


5.56x45 Nato Frangible – Load data

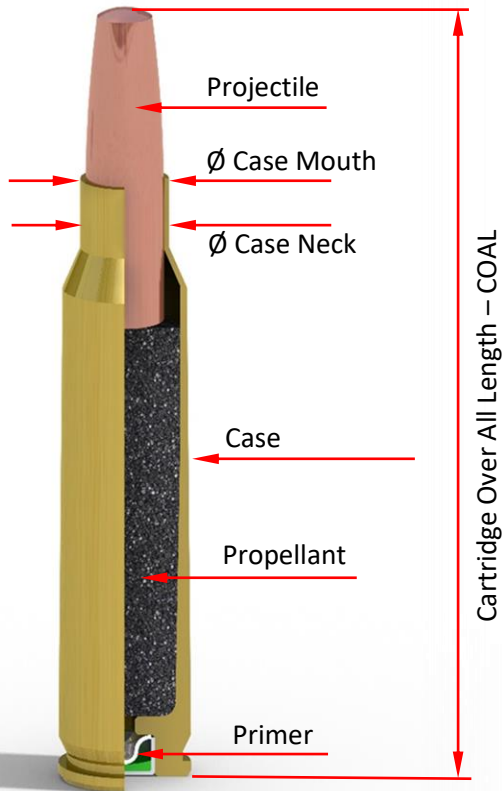

Projectile: 5.56x45 Frangible 55gr

Propellant: See table with load data below

Case: Any 5.56x45 Nato case that meets the requirements according to C.I.P. or SAAMI

Primer: Small Rifle, preferably lead free

Cartridge Over All Length - COAL:

57,4mm +0mm / -0,2 mm

Ø Case Neck: 6,30mm

Ø Case Mouth: 6,32mm +0,02mm / -0,02mm

IMPORTANT: Do not crimp the bullets!

A slightly flared, or at least a straight case mouth is required to avoid problems with cracked bullets.

The bullet material is intentionally brittle to some degree to fulfill the fragmentation requirements for frangible bullets.

Load Data

Propellant type	Recommended load [grains]
Norma N200	22
Norma N201	24
Hodgdon CFE 223	26
Hodgdon H335	22
Vihtavouri N135	22
Vihtavouri N140	25

IMPORTANT: These values are to be seen as an indication only and CBJ Tech AB cannot guarantee them. Every weapon type is unique and different brands of components may differ slightly and give different results. It is important to start at lighter loads and increase incrementally while checking signs of high pressure and the function of each weapon, in order to avoid damaging weapons or causing injuries.



Made in Sweden